


Topología. Guardar como “Base.pkt”

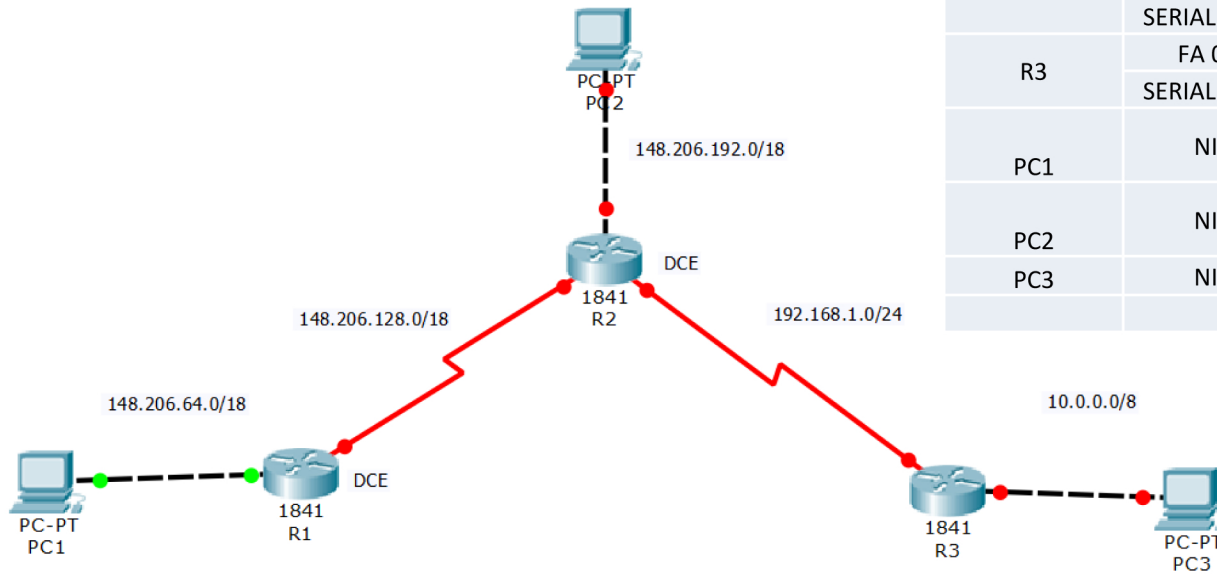

		clock rate: 64000		
DISPOSITIVO	INTERFAZ	IP	MÁSCARA	GATEWAY
R1	FA 0/0	148.206.64.1	255.255.192.0	NA
	SERIAL 0/0/0	148.206.128.1	255.255.192.0	NA
R2	FA 0/0	148.206.192.1	255.255.192.0	NA
	SERIAL 0/0/0	148.206.128.2	255.255.192.0	NA
	SERIAL 0/0/1	192.168.1.1	255.255.255.0	NA
R3	FA 0/0	10.0.0.1	255.0.0.0	NA
	SERIAL 0/0/0	192.168.1.2	255.255.255.0	NA
PC1	NIC	148.206.64.2	255.255.192.0	148.206.64.1
PC2	NIC	148.206.192.2	255.255.192.0	148.206.192.1
PC3	NIC	10.0.0.2	255.0.0.0	10.0.0.1